

Routing guide

Outer copper from saved tracks, pads and vias. Filled zones are omitted for clarity.

Front copper

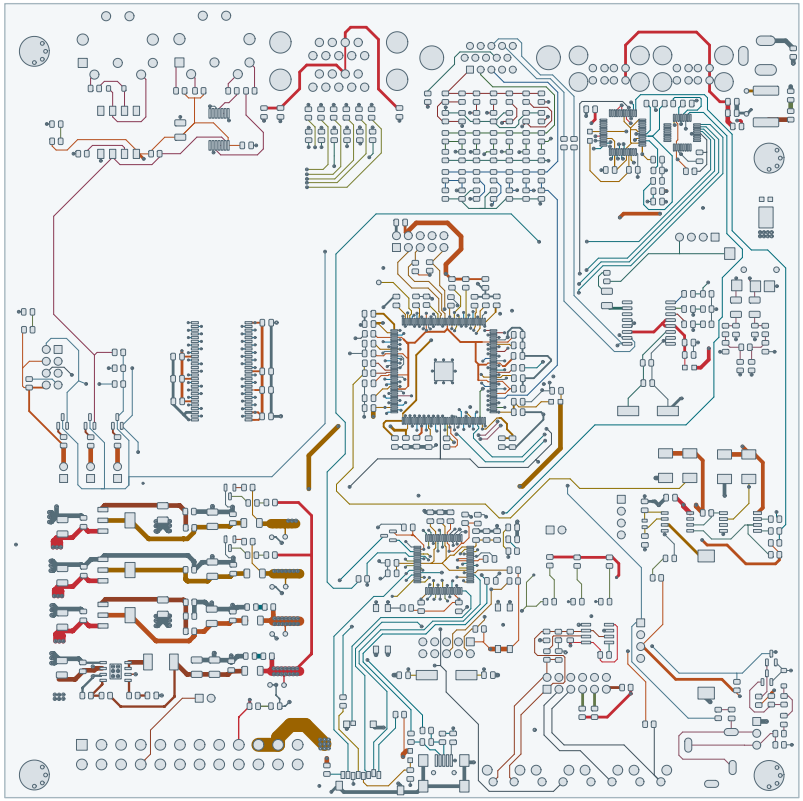

Back copper / through-board view

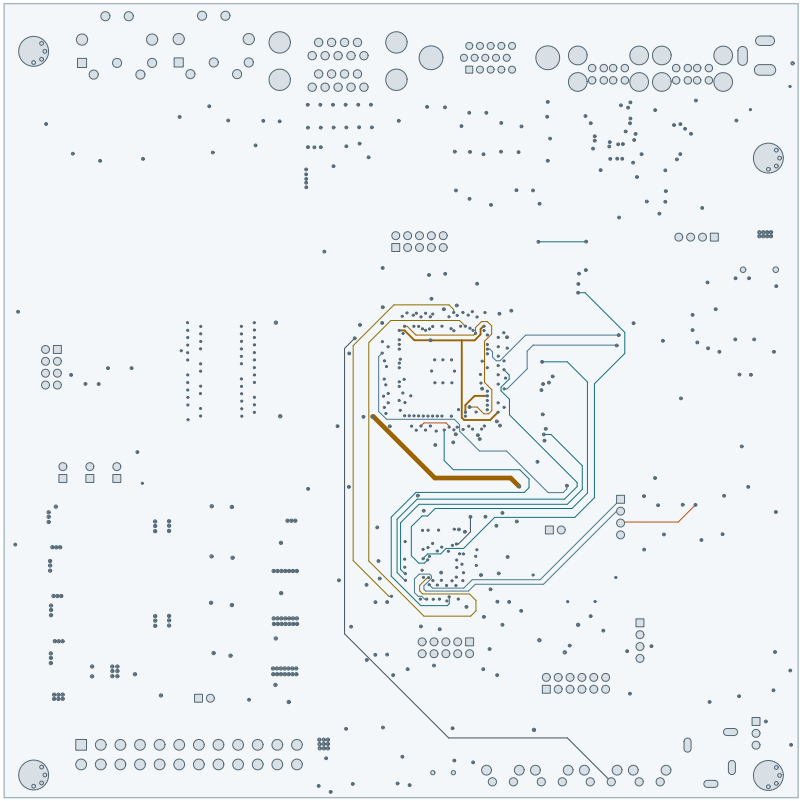

Colours identify net function. Grey pads and vias retain the saved geometry. Use native PCB layers for inner copper, zone fills and fabrication output.

Ranko Rodic / Minimig.ca | Precision-Arrays

V1R9 • generated 2026-10-16 • source a0bd5dacd4aa

Units: mm. Source CAD governs. Regenerate after design changes.